


Ceiling Mounted Round Shower Rose, 300

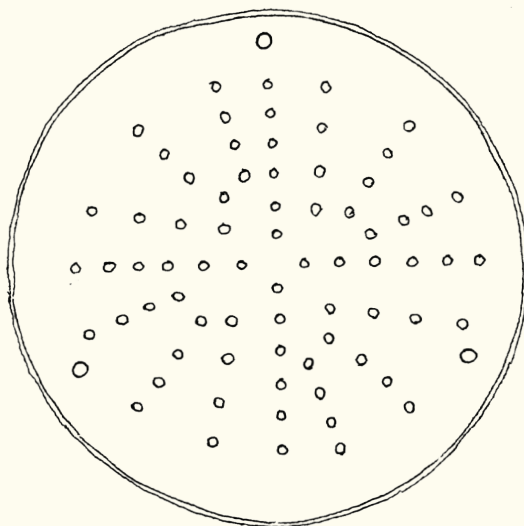

Important information:

To ensure this product is installed properly you must read and follow these guidelines.

The owner/user of this product must keep this information for future reference.

This product must be installed by a professional licensed contractor.

Only use a strap wrench or protected smooth jaw on any finished surface.

ORE

Guarantee and Aftercare

When installing or using tools, extra care must be taken to avoid damaging the finish or fitting. To maintain the appearance, please ensure it is cleaned regularly using a clean soft damp cloth only. Abrasive cleaners or detergents must not be used as they may cause surface deterioration. The company provides a guarantee against faulty material or manufacture excluding serviceable parts, providing they have been installed, cared for and used in accordance with our instructions.

More information on our Warranty and Aftercare can be found on our website.

Earth Bonding

Earth any new pipe satisfactorily (seek expert advice if in doubt).

The company reserves the right to continually evolve its product lines without notification.

The company will not accept any liability regarding specification changes and their consequences unless previously quoted by the company in writing.

Installation Procedure


Prior to installation please ensure that all the supply pipes have been flushed through to remove any debris and then ensure the water supply is turned off. Ensure you have all the relevant tools before commencing the installation and take note of any specific markings on the product to make sure that they are installed correctly.

Dimensions, operating pressures, flow rates and connection specifications are shown opposite. Please follow the diagrammatic 'Step-by-Step' installation instructions on the following pages.

IMPORTANT: All installation and maintenance procedures must be undertaken by a fully qualified Installer.



Incorrect use, incorrect set up of the hydraulic system, water impurities or limestone deposits along with the use of improper detergents will invalidate the Two-Year Product Care.

**DO NOT use the following detergents: CH₃CH₂OH, HCL, H₂SO₄, CL, H₃P₀₄
or any other corrosive substance.**

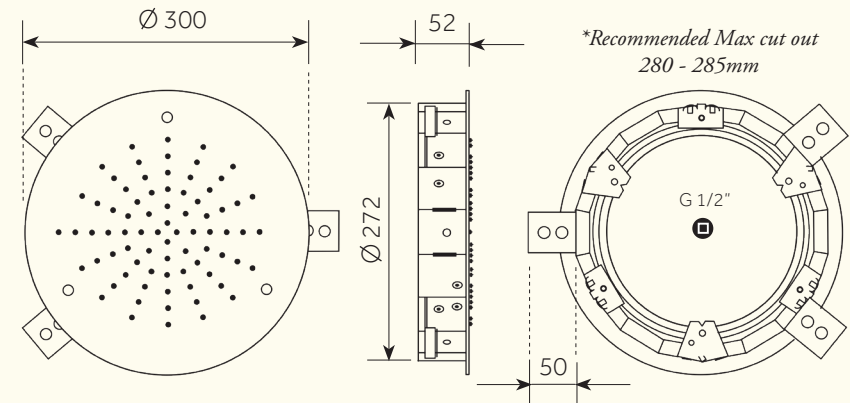


Min/Max Operating pressure: (bars)	1.0 - 5.0									
Flow rates: Bar/L per min	1/3.4	1.5/5.3	2/6.8	2.5/7.4	3/7.9	3.5/8.1	4/8.5	4.5/8.6	5/8.8	
Connection:	1/2" BSP (NPT ADAPTERS ARE INCLUDED)									
Flow Restrictor:	9L/min									

1

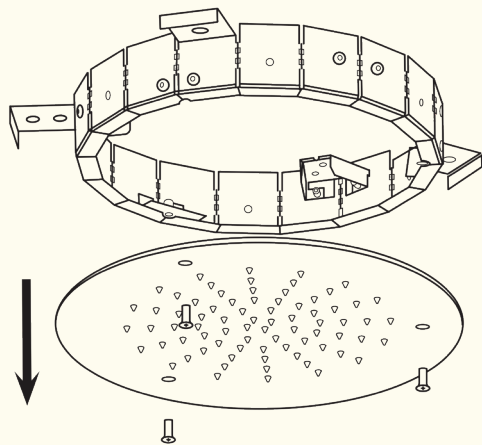

2mm Allen Key



2

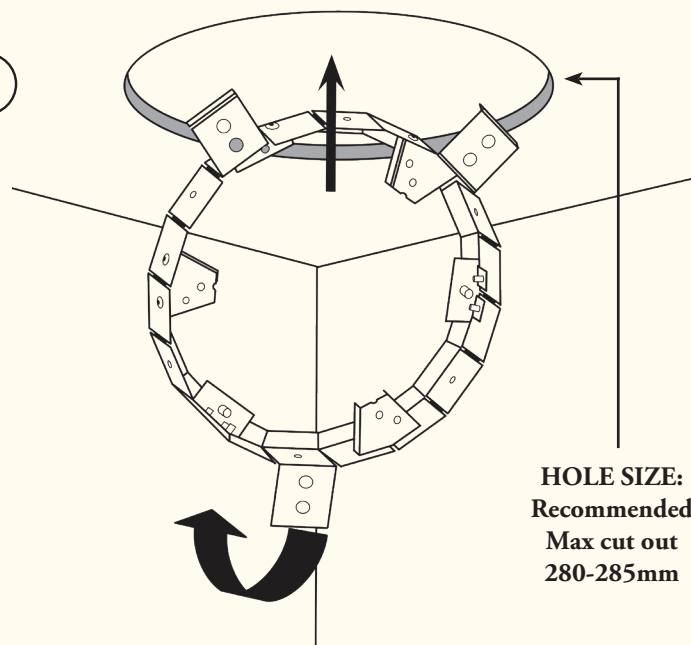


HOLE SIZE:
Recommended
Max cut out
280-285mm

3


Use clamps for fixing

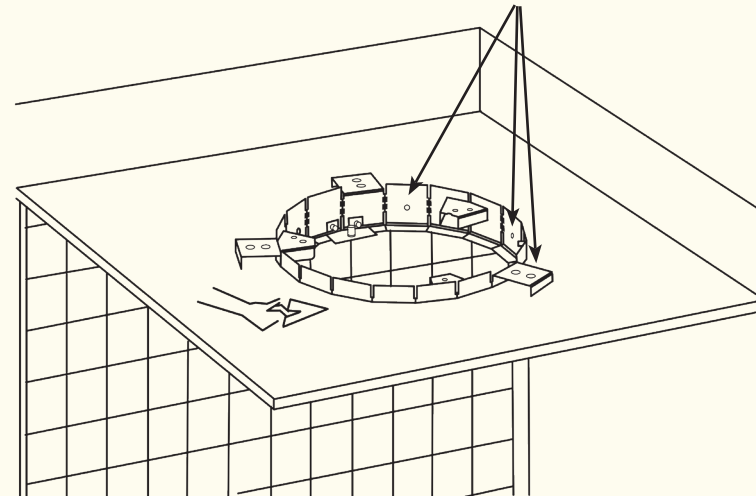

Align frame to ceiling

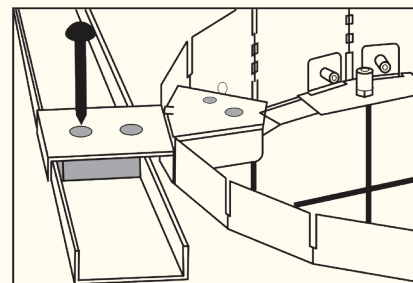


Example A

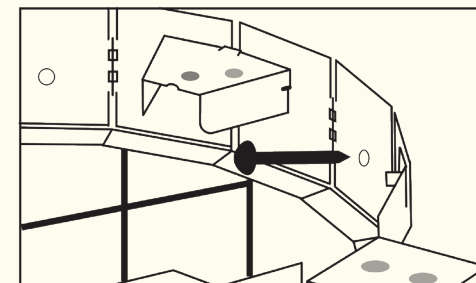


Example B

4

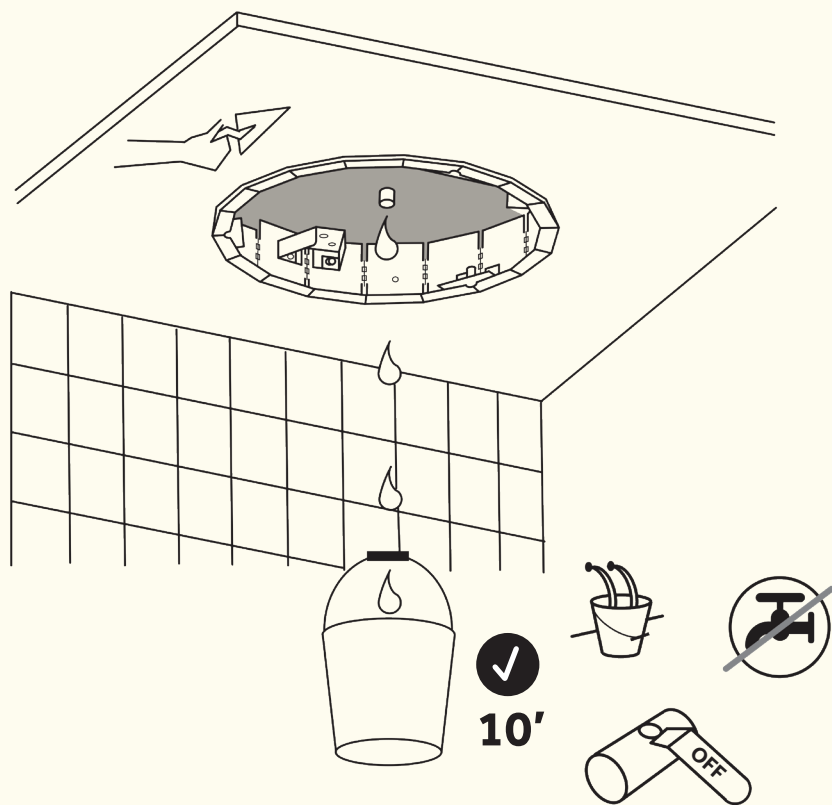

5

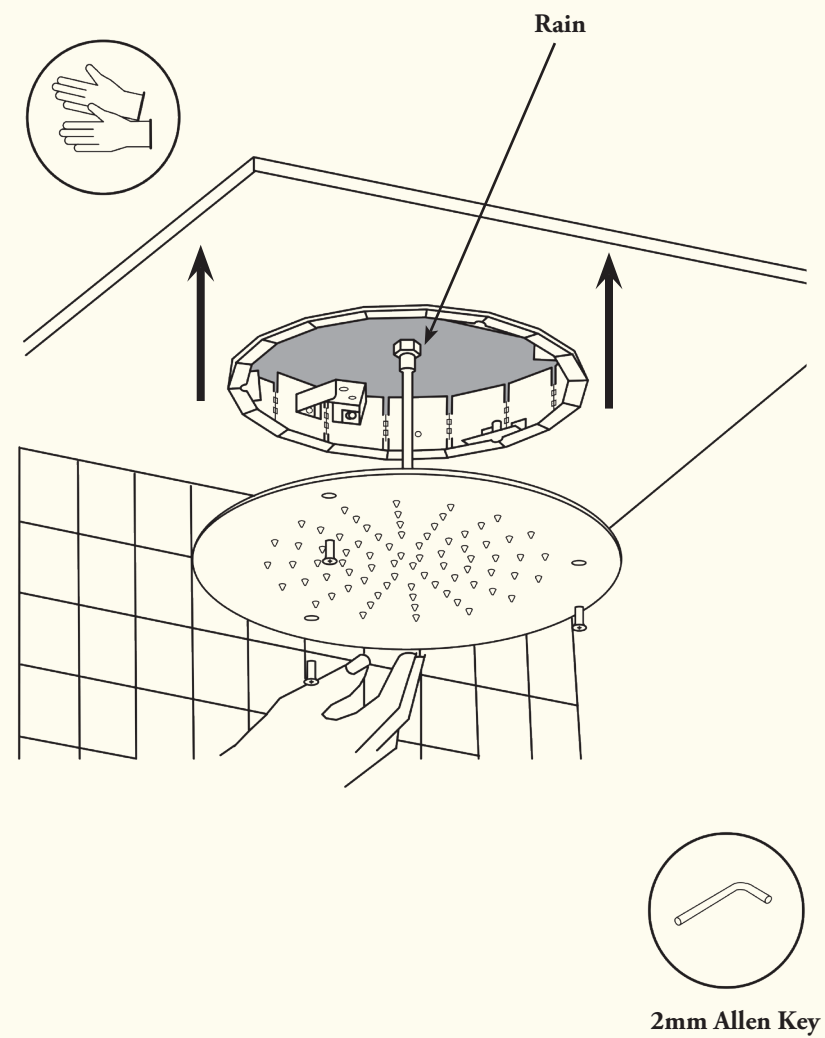

INSTALLER DETAILS:

ORE