


140
V6

PRODUCT NAME

Chapter One - Triple Shower Thermostat with Double Volume Control -V6


INTERNAL FIRST FIX: TM3HIP-V6

Studio/ORE

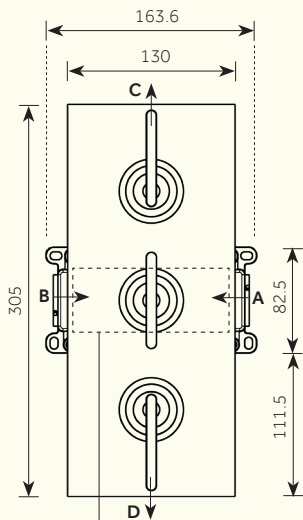

Recommended Max cut out
120 x 55mm

- A:** G3/4" COLD WATER INLET
- B:** G3/4" HOT WATER INLET
- C:** G3/4" WATER OUTLET
- D:** G3/4" WATER OUTLET

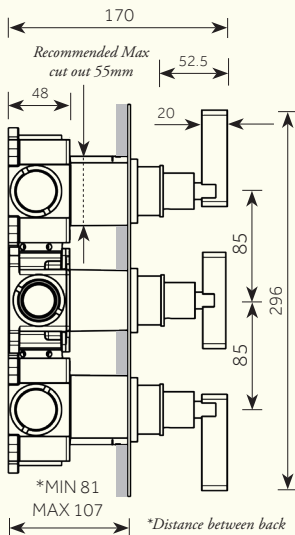

*Distance between back
of Thermostat body &
finished surface of wall



For min/max operating pressures, flow rates & connection information, please see reverse.
Dimensions in mm. Further installation instructions available as a downloadable PDF on the product page of our website.



PRODUCT NAME

Studio/ **ORE**

**Chapter One - Triple Shower Thermostat with
Double Volume Control -V6**

INTERNAL FIRST FIX: TM3HIP-V6

Min/Max Operating pressure: (bars)	0.5 - 6.0						
Flow rates: Bar/L per min Outlet 1	0.5/12.0	1.0/17.0	2.0/24.5	3.0/30.0	4.0/34.6	5.0/38.7	6.0/42.3
Flow rates: Bar/L per min Outlet 2	0.5/12.2	1.0/17.0	2.0/24.5	3.0/30.0	4.0/34.6	5.0/38.7	6.0/42.3
Connection:	3/4" BSP (NPT ADAPTERS ARE AVAILABLE)						

For specifications (in mm), please see reverse.

*Further installation instructions available as a downloadable PDF on the product page
of our website.*