


141
V6

PRODUCT NAME

Chapter One - Triple Shower Thermostat with Two Ways Diverter - V6


INTERNAL FIRST FIX: TM3HDIVIP-V6

Studio/ORE

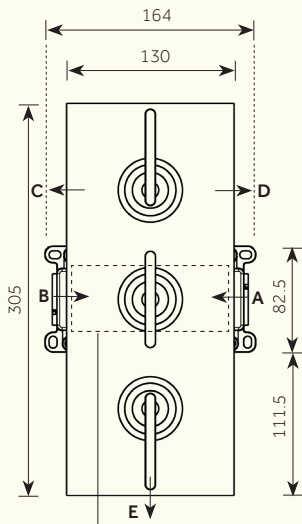

Recommended Max cut out
120 x 55mm

- A:** G3/4" COLD WATER INLET
- B:** G3/4" HOT WATER INLET
- C:** G3/4" WATER OUTLET
- D:** G3/4" WATER OUTLET
- E:** G3/4" WATER OUTLET

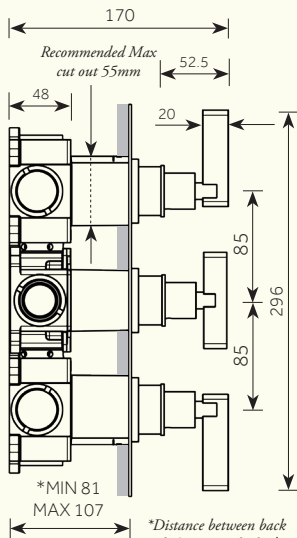

INTERNAL EXTERNAL

*For min/max operating pressures, flow rates and connection specifications,
please see reverse.*

Dimensions in mm. Further installation instructions available as a downloadable PDF
on the product page of our website.



PRODUCT NAME

Studio/ ORE

Chapter One - Triple Shower Thermostat with Two Ways Diverter -V6

INTERNAL FIRST FIX: TM3HDIVIP-V6

Min/Max Operating pressure: (bars)	0.5 - 6.0						
Flow rates: Bar/L per min OUTLET 1 (Full Flow)	0.5/9.20	1.0/13.4	2.0/19.10	3.0/23.50	4.0/27.30	5.0/30.60	6.0/32.60
Flow rates: Bar/L per min OUTLET 2 (Full Flow)	0.5/9.50	1.0/13.7	2.0/19.50	3.0/24.00	4.0/27.90	5.0/31.30	6.0/34.20
Flow rates: Bar/L per min OUTLET 3 (Full Flow)	0.5/12.00	1.0/17.00	2.0/24.50	3.0/30.00	4.0/34.60	5.0/38.70	6.0/42.30
Connection:	3/4" BSP (NPT ADAPTERS ARE AVAILABLE)						

For specifications (in mm), please see reverse.

*Further installation instructions available as a downloadable PDF on the product page
of our website.*