
## Studio / ORE



### PRODUCT NAME

# Chapter One - Dual Exposed Shower Thermostat with Two Ways Diverter, Double Curve

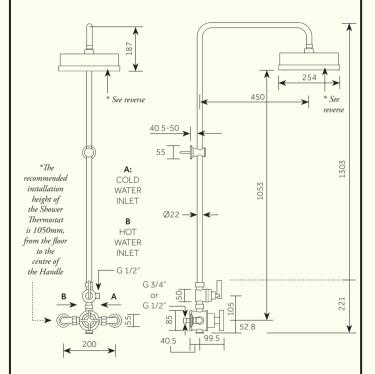

For Flow Rate information (Litres/min), please see reverse for details.

Dimensions in mm. Further installation instructions available as a downloadable PDF on the product page of our website.



### PRODUCT NAME

# Chapter One - Dual Exposed Shower Thermostat with Two Ways Diverter, Double Curve

| Min/Max Operating pressure:<br>(bars)        | 0.5 - 6.0                                      |        |        |        |        |         |        |
|--|--|--------|--------|--------|--------|---------|--------|
| Flow rates: Bar/L per min<br>(FIRST OUTLET)  | 0.5/13.0                                       | 1/18.5 | 2/27.2 | 3/33.7 | 4/38.5 | 5 /42.9 | 6/46.0 |
| Flow rates: Bar/L per min<br>(SECOND OUTLET) | 0.5/13.0                                       | 1/18.5 | 2/26.1 | 3/32.0 | 4/36.0 | 5/38.0  | 6/40.9 |
| Connection:                                  | 1/2" BSP, 3/4" BSP (NPT ADAPTERS ARE INCLUDED) |        |        |        |        |         |        |

\*Rose is NOT included with this product.

| * Rose Style          | Product Number | Width        |  |  |
|-----------------------|----------------|--------------|--|--|
| Minimalist, Victorian | G6м, G6v       | 6" (Ø150mm)  |  |  |
| Minimalist, Victorian | G8m, G8v       | 8" (Ø200mm)  |  |  |
| Minimalist, Flat      | G10m, G10F     | 10" (Ø250mm) |  |  |

G6, 8, 10 Minimalist



G10 Flat

\*\*Complimentary items include Products 74, 175 and 25-V2.

For Specifications in mm, please see reverse for details.

Further installation instructions available as a downloadable PDF on the product page of our website.