


160
SC

PRODUCT NAME

Chapter One - Triple Exposed Shower Thermostat with Exposed Arm & In-Wall Outlet, Single Curve

Studio/ ORE

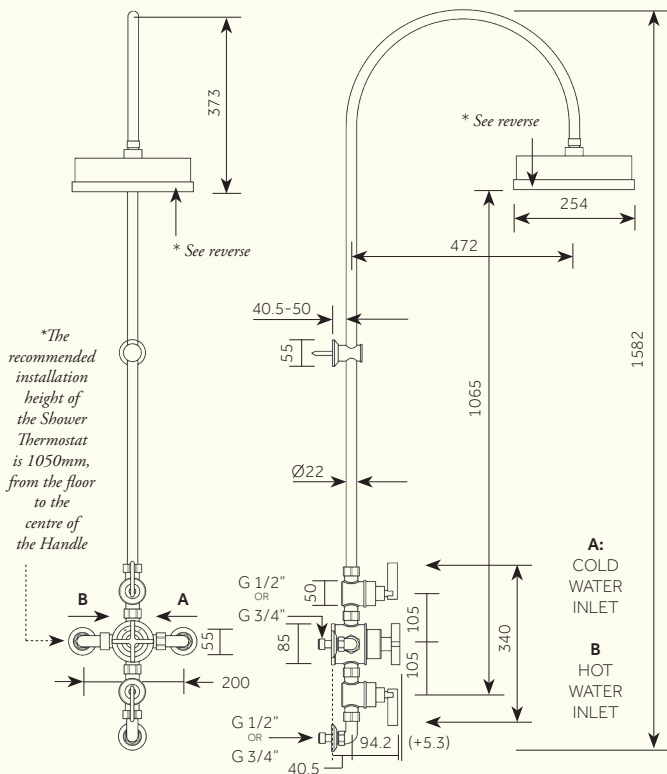

For Flow Rate information (Litres/min), please see reverse for details.

Dimensions in mm. Further installation instructions available as a downloadable PDF on the product page of our website.



Studio/ ORE

PRODUCT NAME

Chapter One - Triple Exposed Shower Thermostat with Exposed Arm & In-Wall Outlet, Single Curve


Min/Max Operating pressure: (bars)	0.5 - 6.0						
Flow rates: Bar/L per min (FIRST OUTLET)	0.5/13.2	1/18.5	2/26.8	3/32.5	4/37.5	5/42.0	6/45.5
Flow rates: Bar/L per min (SECOND OUTLET)	0.5/13.1	1/18.5	2/27.0	3/32.5	4/37.5	5/42.0	6/45.5
Flow rates: Bar/L per min (ON/OFF : BOTH OPEN)	0.5/16.3	1/23.1	2/33.1	3/39.9	4/45.5	5/50.0	6/55.0
Connection:	1/2" 3/4" BSP (NPT ADAPTERS ARE INCLUDED)						

**Rose is NOT included with this product.*

* Rose Style Product Number Width

Minimalist, Victorian	G6M, G6v	6" (Ø150mm)
Minimalist, Victorian	G8M, G8v	8" (Ø200mm)
Minimalist, Flat	G10M, G10F	10" (Ø250mm)

G6, 8, 10 Minimalist



G6, 8, Victorian



G10 Flat



****Complimentary items include Products 73, 173, 74, 175, 25-V2 and 99-V2.**

For Specifications in mm, please see reverse for details.

Further installation instructions available as a downloadable PDF on the product page of our website.