


# Chapter One - Triple Exposed Shower Thermostat with In-Wall Volume Controls

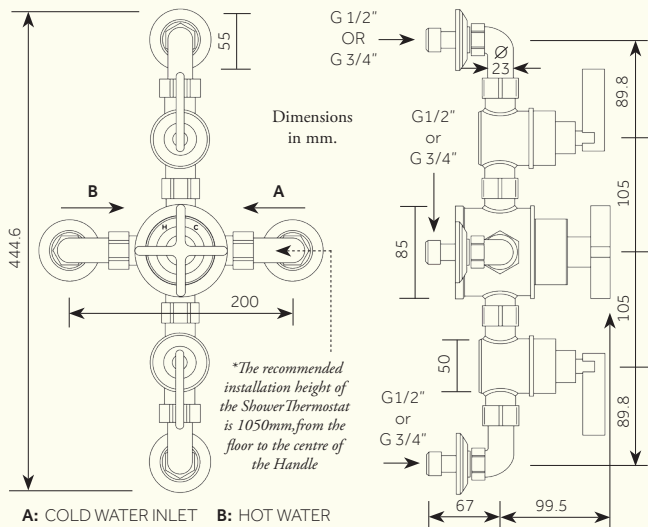

*\*Complimentary items include Products 26, 27, 32, 60 (all Shower Arms) 73, 173, 74, 175, 25-V2 and 99-V2.*

Min/Max Operating pressure: (bars)	0.5 - 6.0						
Flow rates: Bar/L per min (FIRST OUTLET)	0.5/13.2	1/18.5	2/26.8	3/32.5	4/37.5	5/42.0	6/45.5
Flow rates: Bar/L per min (SECOND OUTLET)	0.5/13.1	1/18.5	2/27.0	3/32.5	4/37.5	5/42.0	6/45.5
Flow rates: Bar/L per min (ON/OFF : BOTH OPEN)	0.5/16.3	1/23.1	2/33.1	3/39.9	4/45.5	5/50.0	6/55.0
Connection:	1/2" 3/4" BSP (NPT ADAPTERS ARE INCLUDED)						

*Further installation instructions available as a downloadable PDF on the product page of our website.*