


## Chapter Two - Triple Exposed Shower Thermostat with In-Wall Volume Controls

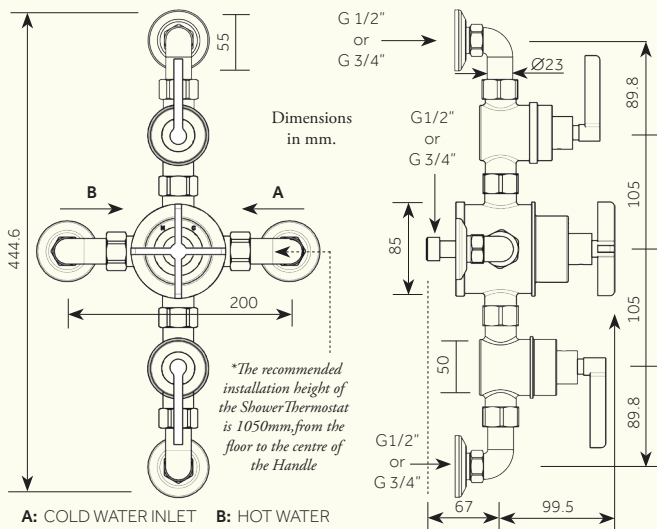

*\*Complimentary items include Products 226, 227, 232, 260 (all Shower Arms) 73, 173, 217, 274, 275, 225 and 99-V2.*

*For min/max operating pressures, flow rates & connection information, please see reverse.*

*Dimensions in mm. Further installation instructions available as a downloadable PDF on the product page of our website.*

## Chapter Two - Triple Exposed Shower Thermostat with In-Wall Volume Controls


Min/Max Operating pressure: (bars)	0.5 - 6.0						
Flow rates: Bar/L per min (FIRST OUTLET)	0.5/13.2	1/18.5	2/26.8	3/32.5	4/37.5	5/42.0	6/45.5
Flow rates: Bar/L per min (SECOND OUTLET)	0.5/13.1	1/18.5	2/27.0	3/32.5	4/37.5	5/42.0	6/45.5
Flow rates: Bar/L per min (ON/OFF : BOTH OPEN)	0.5/16.3	1/23.1	2/33.1	3/39.9	4/45.5	5/50.0	6/55.0
Connection:	1/2" 3/4" BSP (NPT ADAPTERS ARE INCLUDED)						

*\*Rose is NOT included with this product.*

*Rose Style	Product Number	Width
Minimalist, Victorian	G6M, G6V	6" (Ø 150mm)
Minimalist, Victorian	G8M, G8V	8" (Ø 200mm)
Minimalist, Flat	G10M, G10F	10" (Ø 250mm)
Flat	G12F	12" (Ø 300mm)

*NOTE: The Shower Arm is compatible with all of our Shower Roses 6", 8", 10", 12".*

G6, 8, 10 Minimalist



G6, 8, Victorian



G10, 12 Flat



*For Specifications in mm, please see reverse for details.*

*Further installation instructions available as a downloadable PDF on the product page of our website.*