


Chapter Three - Deck Mounted Bath Spout

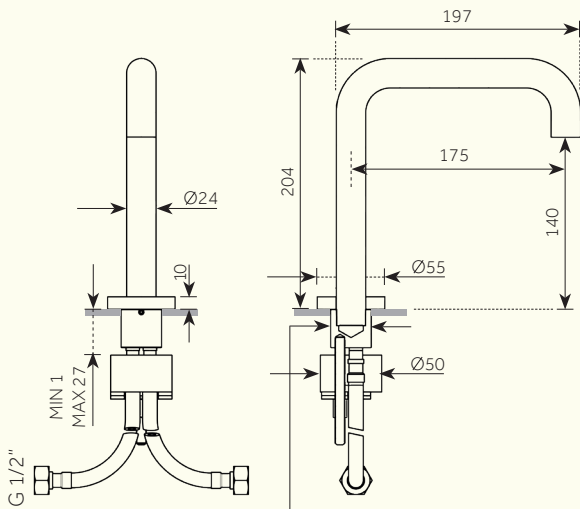


Recommended Max cut out 40mm

*For min/max operating pressures, flow rates, connection information
& inlet options, please see reverse.*


Dimensions in mm. Further installation instructions available as a downloadable PDF
on the product page of our website.

Chapter Three - Deck Mounted Bath Spout

Single Inlet Option

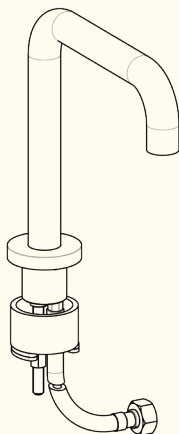

Double Inlet Option

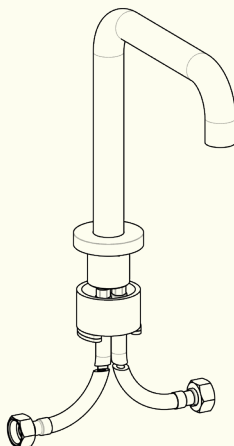

Min/Max Operating pressure: (bars)	0.5 - 5.0					
Flow rates: Bar/L per min (with Aerator)	0.5/6	1/8.4	2/11.8	3/14.5	4/16.8	5/18.7
Flow rates: Bar/L per min (without Aerator)	0.5/7.5	1/10.5	2/14.7	3/18	4/20.8	5/23.3
Connection:	1/2" BSP (EU) 9/16" UNEF (US)					
Flow Restrictor:	B (22.8 - 25.2L per min @ 3 bars) (EU) X (2.2 Gpm MAX @ 60 Psi) (US)					

For specifications in mm, please see reverse for details.

Further installation instructions available as a downloadable PDF on the product page of our website.