
Studio/ **ORE**

435B

PRODUCT NAME

Chapter Four - Dual Shower Thermostat with Two Ways Diverter - Bell

INTERNAL FIRST FIX: TM2HDIVIP - V6

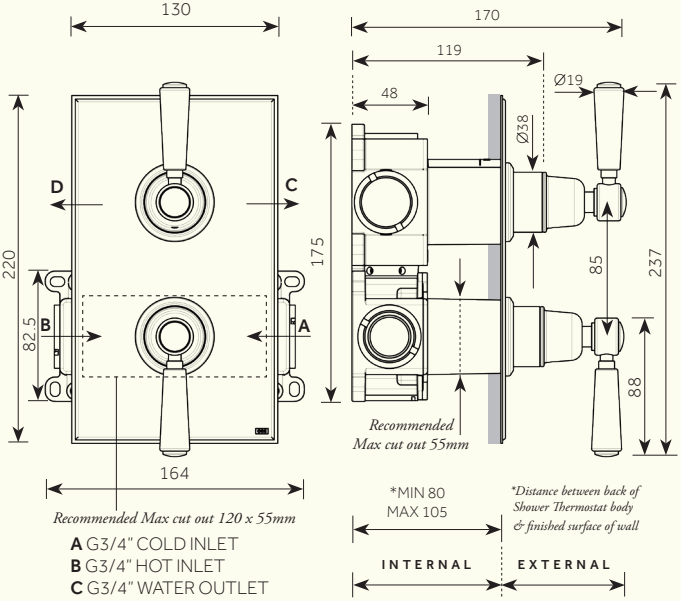

A G3/4" COLD INLET
B G3/4" HOT INLET
C G3/4" WATER OUTLET
D G3/4" WATER OUTLET

Min/Max Operating pressure: (bars)	**0.5 - 6.0**						
Flow rates: Bar/L per min Outlet 1	**0.5/9.2**	**1.0/13.4**	**2.0/19.1**	**3.0/23.5**	**4.0/27.3**	**5.0/30.6**	**6.0/32.6**
Flow rates: Bar/L per min Outlet 2	**0.5/9.5**	**1.0/13.7**	**2.0/19.5**	**3.0/24.0**	**4.0/27.9**	**5.0/31.3**	**6.0/34.2**
Connection:	**3/4" BSP (NPT ADAPTERS ARE INCLUDED)**						

Dimensions in mm. *Further installation instructions available as a downloadable PDF on the product page of our website.*