
Studio/ **ORE**


441B

PRODUCT NAME

Chapter Four - Triple Shower Thermostat with Two Ways Diverter - Bell

INTERNAL FIRST FIX: TM3HDIVIP-V6

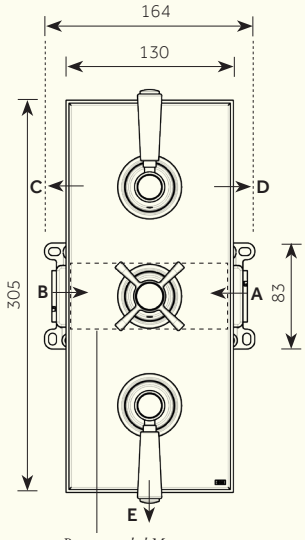

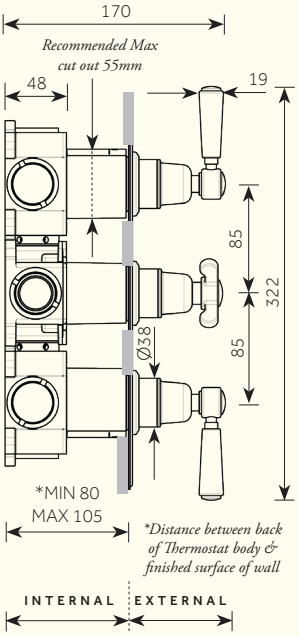

A G3/4" COLD WATER INLET
B G3/4" HOT WATER INLET
C G3/4" WATER OUTLET
D G3/4" WATER OUTLET
E G3/4" WATER OUTLET

For min/max operating pressures, flow rates & connection information, please see reverse.

Dimensions in mm. *Further installation instructions available as a downloadable PDF on the product page of our website.*

441B

PRODUCT NAME

Chapter Four - Triple Shower Thermostat with Two Ways Diverter - Bell

INTERNAL FIRST FIX: TM3HDIVIP-V6

Min/Max Operating pressure: (bars)	**0.5 - 6.0**						
Flow rates: Bar/L per min Outlet 1	0.5/9.20	1.0/13.40	2.0/19.10	3.0/23.50	4.0/27.30	5.0/30.60	6.0/32.60
Flow rates: Bar/L per min Outlet 2	0.5/9.50	1.0/13.70	2.0/19.50	3.0/24.00	4.0/27.90	5.0/31.30	6.0/34.20
Flow rates: Bar/L per min Outlet 3	0.5/12.00	1.0/17.00	2.0/24.50	3.0/30.00	4.0/34.60	5.0/38.70	6.0/42.30
Connection:	**3/4" BSP (NPT ADAPTERS ARE AVAILABLE)**						

For specifications (in mm), please see reverse.

Further installation instructions available as a downloadable PDF on the product page of our website.