466B


PRODUCT NAME

Chapter Four - Wall Mounted Volume Control with Backplate - Bell

INTERNAL FIRST FIX: TM1HO/FIP-V5

For Backplate Options see reverse

**Min Max distances between centre of outlet/inlet & finished surface of wall*

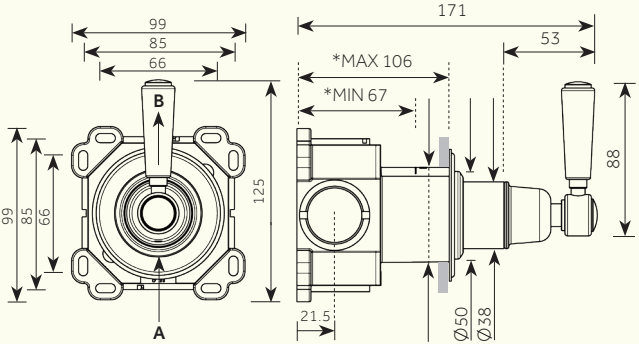

A: G3/4" WATER INLET
B: G3/4" WATER OUTLET

Recommended Max cut out 55 mm

For Flow Rate information (Litres/min), please see reverse for details.

Dimensions in mm. *Further installation instructions available as a downloadable PDF on the product page of our website.*


466B

PRODUCT NAME

Chapter Four - Wall Mounted Volume Control with Backplate - Bell

INTERNAL FIRST FIX: TM1HO/FIP-V5

Backplate Options:
SQ / CR: 75 mm
SQ / CR: 100 mm



Min/Max Operating pressure: (bars)	**0.5 - 6.0**						
TM1HO/FIP - V5 Flow rates: Bar/L per min Outlet 1	**0.5/18.90**	**1.0/26.15**	**2.0/37.10**	**3.0/45.30**	**4.0/46.81**	**5.0/46.81**	**6.0/46.81**
Connection:	**3/4" BSP (NPT ADAPTERS ARE INCLUDED)**						

For Specifications in mm, please see reverse for details.

Further installation instructions available as a downloadable PDF on the product page of our website.