Studio/ **ORE**

467B


PRODUCT NAME

Chapter Four - Wall Mounted Two Ways Diverter with Backplate - Bell

INTERNAL FIRST FIX: TM1HDIVIP-V5

For Backplate Options see reverse

**Min Max distances between centre of outlet/inlet & finished surface of wall*

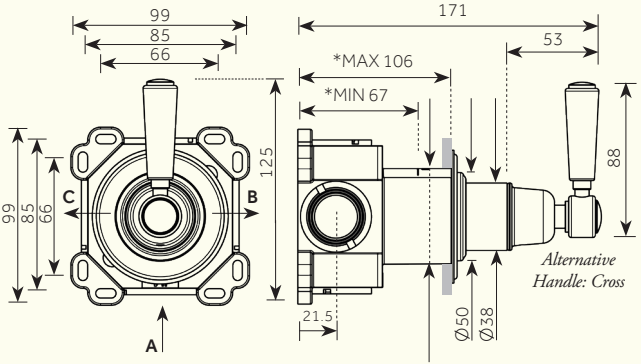

A: G3/4" WATER INLET
B: G3/4" WATER OUTLET
C: G3/4" WATER OUTLET

For Flow Rate information (Litres/min), please see reverse for details.

Dimensions in mm. *Further installation instructions available as a downloadable PDF on the product page of our website.*

Studio/ **ORE**


467B

PRODUCT NAME

Chapter Four - Wall Mounted Two Ways Diverter with Backplate - Bell

INTERNAL FIRST FIX: TM1HDIVIP-V5

Backplate Options:
SQ / CR: 75 mm
SQ / CR: 100 mm



Min/Max Operating pressure: (bars)	**0.5 - 6.0**						
Flow rates: Bar/L per min (OUTLET 1)	**0.5/15.7**	**1/21.7**	**2/30.6**	**3/37.6**	**4/43.5**	**5/46.8**	**6/46.8**
Flow rates: Bar/L per min (OUTLET 2)	**0.5/15.7**	**1/21.8**	**2/30.2**	**3/37.2**	**4/43.0**	**5/46.81**	**6/46.81**
Connection:	**3/4" BSP (NPT ADAPTERS ARE INCLUDED)**						
Flow Restrictor:	**N/A**						

For Specifications in mm, please see reverse for details.

Further installation instructions available as a downloadable PDF on the product page of our website.