*Studio/* **ORE**


493B

PRODUCT NAME

## Chapter Four - Wall Mounted Shower Mixer with Progressive Cartridge & Backplate - Bell

INTERNAL FIRST FIX: SHMNPCIP

**Min Max distances between centre of outlet/ inlet& finished surface of wall*

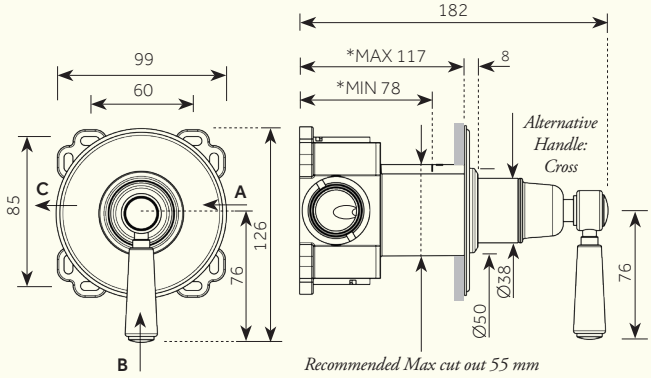


**A:** G3/4" COLD WATER INLET
**B:** G3/4" HOT WATER INLET
**C:** G3/4" WATER OUTLET

*For min/max operating pressures, flow rate information(L/min) and connection specifications, please see reverse for details.*

Dimensions in mm. *Further installation instructions available as a downloadable PDF on the product page of our website.*

*Studio/* **ORE**


493B

PRODUCT NAME

## Chapter Four - Wall Mounted Shower Mixer with Progressive Cartridge & Backplate - Bell

INTERNAL FIRST FIX: SHMNPCIP

*Back Plate Option:*
SQ / CR: 100 mm



| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Min/Max Operating pressure: (bars) | 0.5 - 6.0 | | | | | | |
| Flow rates: Bar/L per min (OUTLET 1) | 0.5/7.95 | 1/11.05 | 2/15.50 | 3/18.94 | 4/21.35 | 5/24.35 | 6/26.60 |
| Connection: | 3/4" BSP (NPT ADAPTERS ARE INCLUDED) | | | | | | |
| Flow Restrictor: | N/A | | | | | | |

*For Specifications in mm, please see reverse for details.*

*Further installation instructions available as a downloadable PDF on the product page of our website.*