
Studio/ ORE

61

PRODUCT NAME

Chapter One - Wall Mounted Two Ways Diverter with Backplate

INTERNAL FIRST FIX: WDIV2IP -V2

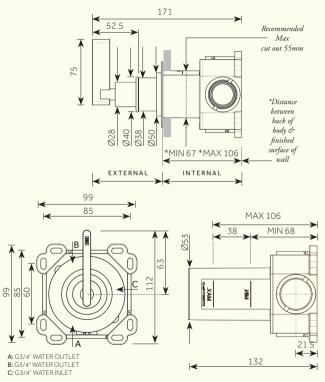

For Backplate options, please see reverse.

For min/max operating pressures, flow rates and connection specificatios, please see reverse.


Dimensions in mm. Further installation instructions available as a downloadable PDF on the product page of our website.



PRODUCT NAME

Chapter One - Wall Mounted Two Ways Diverter with Backplate

INTERNAL FIRST FIX: WDIV2IP -V2



Back Plate Options: SQ / CR: 75 mm SQ / CR: 100 mm

Min/Max Operating pressure: (Bars)	0.5 - 6.0						
WDIV2IP - V2 Full Flow: Bar / L per min OUTLET 1	0.5/15.60	1.0/21.55	2.0/36.70	3.0/37.60	4.0/43.50	5.0/46.81	6.0/46.81
WDIV2IP - V2 Full Flow: Bar / L per min OUTLET 2	0.5/16.30	1.0/22.60	2.0/31.70	3.0/38.90	4.0/44.70	5.0/46.81	6.0/46.81
WDIV2IP - V2 Full Flow: Bar / L per min OUTLET 1+2	0.5/19.60	1.0/27.30	2.0/38.60	3.0/46.81	4.0/46.81	5.0/46.81	6.0/46.81
Connection:	3/4" BSP (NPT ADAPTERS ARE INCLUDED)						

For specifications (in mm), please see reverse.

Further installation instructions available as a downloadable PDF on the product page of our website.