


## PRODUCT NAME

**Chapter One - Wall Mounted Three Ways Diverter  
with Stop Position & Backplate**

INTERNAL FIRST FIX: TM1H3WDIVIP


*\*Min Max distances between  
centre of outlet/inlet  
& finished surface of wall*

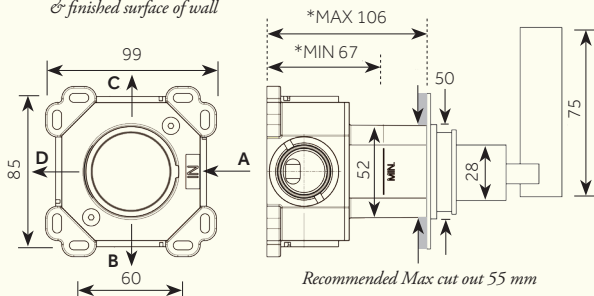

- A:** G3/4" WATER INLET  
**B:** G3/4" WATER OUTLET  
**C:** G3/4" WATER OUTLET  
**D:** G3/4" WATER OUTLET

*Back Plate Options:*

- SQ / CR: 75 mm  
 SQ / CR: 100 mm



*For min/max operating pressures, flow rates (Litres/min) and connection specifications,  
please see reverse for details.*

Dimensions in mm. Further installation instructions available as a downloadable PDF  
on the product page of our website.



PRODUCT NAME

Studio/ **ORE**

**Chapter One - Wall Mounted Three Ways Diverter  
with Stop Position & Backplate**

INTERNAL FIRST FIX: TM1H3WDIVIP

Min/Max Operating pressure: (bars)	0.5 - 6.0						
Flow rates: Bar/L per min (OUTLET 1)	0.5/16.30	1/22.40	2/31.00	3/37.00	4/42.70	5/46.81	6/46.81
Flow rates: Bar/L per min (OUTLET 2)	0.5/16.95	1/23.50	2/32.80	3/40.60	4/46.30	5/46.81	6/46.81
Flow rates: Bar/L per min (OUTLET 3)	0.5/16.20	1/22.40	2/31.60	3/38.40	4/43.60	5/46.81	6/46.81
Connection:	3/4" BSP (NPT ADAPTERS ARE INCLUDED)						
Flow Restrictor:	N/A						

*For Specifications in mm, please see reverse for details.*

*Further installation instructions available as a downloadable PDF on the product page of our website.*